Date: Nov. 28, 2012

Optical Data Transmission Device DMS-GF2A/B-02 DMS-HF2A/B-02


Specifications


> ×								
< ×								
$\triangle \times 4$	Supply Voltage & Current Consumption			3 - 5	Oct.8'14	Yamaguchi	FA-7721	
Svmbol	Corrected Reason			Page	Date	Corrector	No.	
Approved by	Checked by	Drawn by	Designed by		Optical Data Transmission Device		vice	
			IGUCHI Drawing No.		DMS-	G/HF2A/B-02	series Specifi	cations
HINO	HINO	IGUCHI				C-42-3827A		1/5

1. Features

- Optical transmission with signals through the interface of RS-232C
- · Full duplex two-way transmission

2. Composition






3. Kinds

Model number	Transmission Frequency	Reception Frequency
DMS-G/HF2A-02	5.5MHz	6.0MHz
DMS-G/HF2B-02	6.0MHz	5.5MHz

4. Inner circuit block diagram

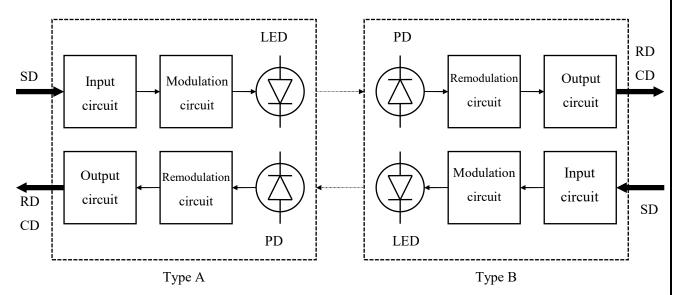

Since this device is full duplex two-way transmission system, modulation frequency is divided into type A and B, to prevent interference of transmission signal and reception signal each other. Therefore, be sure to use type A with transmission in 5.5MHz and reception in 6.0MHz and type B with transmission in 6.0MHz and reception in 5.5MHz, in pair.

	Optical Data Transmission Device	Drawing		2 /5
Title	DMS-G/HF2A/B-02 Specifications	No.	C-42-3827A	2/3

5. Specifications

Model number	DIAG GEO L OO	D) (G GEAD 00	D) (G HEQ) 00	D) (G HED) 00		
Transmission	DMS-GF2A-02	DMS-GF2B-02	DMS-HF2A-02	DMS-HF2B-02		
Distance						
Directional angle	Full angle 5 degree					
Transmission direction	HEAD-ON SIDE-ON					
Power source		12 to 24VDC 🛆				
Current consumption		Max. 70mA (at 12V) Max. 50mA (at 24V)				
Transmission method		Full duplex two-	way transmission			
Transmission speed		DC ~ 9600BPS				
Interface	RS-232C					
Modulated method	FSK					
Modulation frequency	Transmission 5.5MHz Reception 6.0MHz	Transmission 6.0MHz Reception 5.5MHz	Transmission 5.5MHz Reception 6.0MHz	Transmission 6.0MHz Reception 5.5MHz		
CD output	NPN transistor Open-collector output					
Wiring	Flying lead wire (0.2mm ² 7-core shield wire)					
Ambient temperature and humidity		-10°C to +50°C, 85%RH or less (not frozen)				
Ambient illuminance		4,000 lu	x or less			
Impact resistance	50	00m/S ² 10 times in ea	ach X, Y and Z directi	on		
Vibration resistance	Double amplitud	e 1.5mm 10 to 55Hz f	or 2 hours in each X,	Y and Z direction		
Protective structure		IP	64			
Weight		250g (including	g Lead wire 2m)			
Indication lamp	POW: Power CD: Light-reception (Carrier Detect) RD: Serial signal reception SD: Serial signal sending SEL: Input to stop transmission/reception (SRD OFF)					
External Dimension	Drawing No. C-40-3534					

Note) This model is compatible communication with DM-GF2A/B and DM-HF2A/B, however the transmission distance (actual value) and the directional angle are different from them.


	Optical Data Transmission Device	Drawing		2 /5
Title	DMS-G/HF2A/B-02 Specifications	No.	C-42-3827A	3/3

6. External Connection

Signal	Purpose	Circuit composition and Remarks
+VIN	Power source	
-VIN	12 to 24VDC △	
(COM)		
CD	Carrier Detect (ON when Carrier Detect)	NPN Open-collector output VCE30V or less, IC IC 50mA or less Residual voltage 1.8V or less VCE
SRD OFF (SEL)	Transmission/Reception stop (Stop transmission/reception by shorted to –VIN)	ON voltage : 2V or less OFF voltage: 8V or more
SD	Transmission Data (Input)	- SD
RD	Reception Data (Output)	RD
SG	GND for signal	SG

Title Optical Data Transmission Device Drawing No. C-42-3827A	Title	Optical Data Transmission Device DMS-G/HF2A/B-02 Specifications	Drawing No.	C-42-3827A	4/5
---	-------	---	----------------	------------	-----

7. Wiring

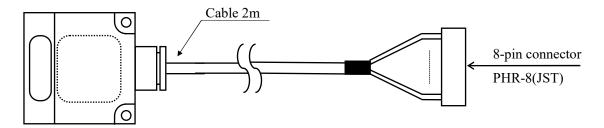

Note) The 8-pin connector attached on the end of the cable cannot be used as connecting terminal.

Pin No.	Color	Signal	Functions
1	Yellow	SD	Input (RS-232C)
2	Green	RD	Output (RS-232C)
3	Brown	SG	GND for Signal
4	Blue	CD	Carrier Detect output
5	White	SRD OFF	Transmission/Reception stop
6			
7	Black	-VIN	0V (Power source)
8	Red	+VIN	+12 to 24V (Power source) \triangle
	Shie	ld	Shield (cut inside of the shrinkable tube))

Note 1) Shield wire must not be connected to ground. To do so may cause electrical noises.

• Lead wire specifications

Items	Size and Diameter
Conductor size	0.18mm^2
Conductor outer dia.	0.54mm
Wire core dia.	1.1mm
Finish dia.	5.5 (+/-0.2mm)

	Optical Data Transmission Device	Drawing		5 /5
Title	DMS-G/HF2A/B-02 Specifications	No.	C-42-3827A	3/3